

## ProxCard Plus®

Wiegand Swipe and Proximity Combination Card

### THE PROXCARD PLUS® COMBINATION CARD OFFERS PROXIMITY AND WIEGAND TECHNOLOGIES WITH OPTIONAL PHOTO ID CAPABILITY ON A SINGLE ACCESS CONTROL CARD.

#### Features:

- Offers universal compatibility with all HID proximity readers.
- Offers a one-card solution for companies desiring to incorporate a combination of proximity, Wiegand, bar code, magnetic stripe and photo ID technologies for multiple facilities.
- Ideal for companies transitioning from a Wiegand technology system to an HID proximity-based system.
- Card thickness is suitable for use with all Wiegand readers and most direct image printers and magnetic stripe readers.

- **Proven, Reliable Technology** - Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- **Thin** - Can be carried with credit cards in a wallet or purse.
- **Cross-reference** - A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration. External numbering matching the encoded numbers is available.
- **Security** - The Wiegand code strip offers over one trillion unique codes. The proximity transponder is programmed to match the Wiegand strip.
- **Long Life** - Passive, no-battery design allows for an infinite number of reads.
- **Durability** - Strong, flexible and resistant to cracking and breaking.
- **Custom Artwork**- Custom multicolor graphics and text are available.

Note: custom graphics may increase overall card thickness.


125 kHz, plain white finish (front), HID artwork (back), customer-specified ID numbers, location marked for slot punch.

## SPECIFICATIONS

### ProxCARD Plus®

<b>Part Number</b>	16-9
<b>Typical Maximum* Read Range</b>	ProxPoint® Plus reader-up to 1.0" (2.5 cm) MiniProx™ reader-up to 2.0" (5.1 cm) ThinLine® II reader-up to 1.5" (3.8 cm) ProxPro® reader-up to 3.0" (7.6 cm) ProxPro® II reader-up to 4.0" (10.2 cm) Prox80™ reader-up to 1.5" (3.8 cm) MaxiProx® reader-up to 13.0" (33.0 cm) EntryProx™ reader-up to 1.0" (2.5 cm) pcProx™ reader-up to 1.0" (2.5 cm) *Dependent on local installation conditions.
<b>Dimensions</b>	2.125" x 3.375" x 0.037" max. (5.4 x 8.6 x 0.095 cm)
<b>Card Construction</b>	Thin, vinyl laminate with an internal Wiegand code strip and proximity circuit. An external ABA standard, high coercivity magnetic stripe is optional.
<b>Code strip layout options</b>	A long edge / right side A1 long edge / left side
<b>Operating Temperature</b>	-50° to 160° F (-45° to 70° C)
<b>Options</b>	Card finish for direct printing (glossy or satin) Magnetic stripe External card numbering Slot punch (horizontal or vertical) Custom graphics
<b>Weight</b>	0.17 oz. (4.8 gm)
<b>Warranty</b>	Lifetime

NOTES:  
\*Dependent on local installation conditions.

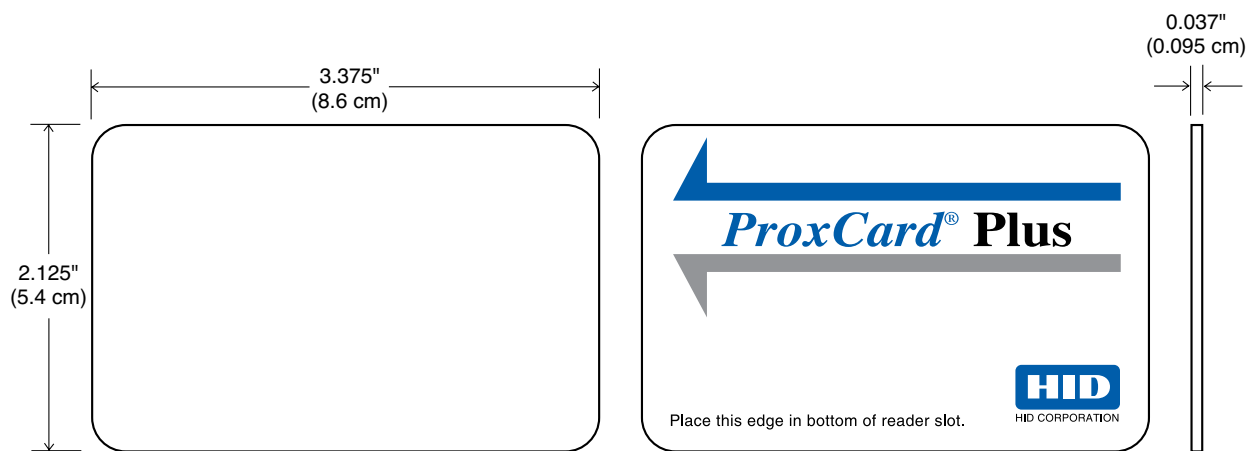

North America: +1 949 732 2000  
 Toll Free: 1 800 237 7769  
 Europe, Middle East, Africa: +44 1440 714 850  
 Asia Pacific: +852 3160 9800  
 Latin America: +52 55 5081 1650

**ASSA ABLOY**  
 An ASSA ABLOY Group brand

© 2011 HID Global Corporation. All rights reserved. HID, the HID logo, ProxCARD logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks and product or service names are trademarks or registered trademarks of their respective owners.  
 2012-05-14-hid-proxcards-plus-cards-ds-en